



## 10120AE Solenoid Operated Electro-Mechanical Deadlatch



# Electric Locks

For More information please call 210-123-4567



# Electric Locks

## 10120AE Solenoid Operated Electro-Mechanical Deadlatch



### APPLICATION

Medium and maximum security swinging doors that are to be unlocked from a remote location. Jamb mounted. Door position indicator switch, door closer and heavy duty door pull are recommended.

### FUNCTION

**ELECTRIC** - Remote switch activates a solenoid which retracts the latchbolt. Latchbolt remains retracted until door is opened approximately 2", then it releases, automatically latches and deadlocks when the door is closed.

**MECHANICAL** - Latchbolt is retracted with a mogul key at the door, and remains retracted until door is opened approximately 2", then it releases and automatically latches and deadlocks when the door is closed.

### STANDARD FEATURES

- Deadlock indication switch
- Mechanical latchback
- Strike with security fasteners
- Mogul cylinder (US26D Finish)
- Plug connector
- Continuous duty solenoid
- Fail secure
- Mounting fasteners

### OPTIONAL FEATURES

**NO LATCHBACK** - Latchbolt remains retracted as long as control switch is activated. Latchbolt extends when power is removed. Specify "NL."

**KNOB FUNCTION** - Bolt retracted by knob on opposite side of mogul cylinder only. Specify "K."

**MECHANICAL KEY HOLDBACK** - Bolt retracted by key, remains retracted until manually projected with key. UL Listing for fire door not available with this function. Specify "MKH."

**Local Electric Keyswitch** - Day key provides local electric operation and may be disabled from remote control point. Master key provides both electric and mechanical operation. Specify "LEK."

**Emergency Exit Door Holdback** - Deadbolt retracted by solenoid or by key, extended by key only (no snap latch feature).

**10120AE-1: KEYED ONE SIDE**  
**10120AE-2: KEYED BOTH SIDES**



For More information please call 210-123-4567

# Electric Locks

## 10120AE Solenoid Operated Electro-Mechanical Deadlatch

### OPTIONAL FEATURES CNT.

When bolt is extended, lock is dead locked. UL Listing for fire door not available with this function. Specify "EED."


NOTE: Master keying available.

Key Cylinder Extender - An option in place of providing a recess in the frame, when keying on the stop side is required. Available in 3" or 5". 3" extender can be used on openings up to 6" jamb. 5" extender can be used on openings up to 8" jamb. Specify "KCE," then extender size. Other lengths available upon request.


Provide: (See Fig.1) 1. Dimension "A" (overall frame width) 2. Dimension "B" (edge of frame to centerline of lockbolt)

### TECHNICAL DATA

Standard Finish	Galvanized
Cover	10 Gauge Steel Plate
Case	10 Gauge Steel Plate
Strike	Stainless Steel
Latchbolt	2" x 3/4" Stainless steel
Deadlock Actuator	Stainless steel
Mogul Cylinder	Us26d
Mogul Keys	Nickel Silver
Lock Size	17-13/16" H x 6-11/16" W x 3-1/2" D
Lock Weight	19 lbs.
Latchbolt Throw	1"
Electrical	115 VAC, 1 phase, 60 Hz., 10 Amp Inrush, 0.6 Amp Seated
Pin Tumblers	Six tumblers per lock

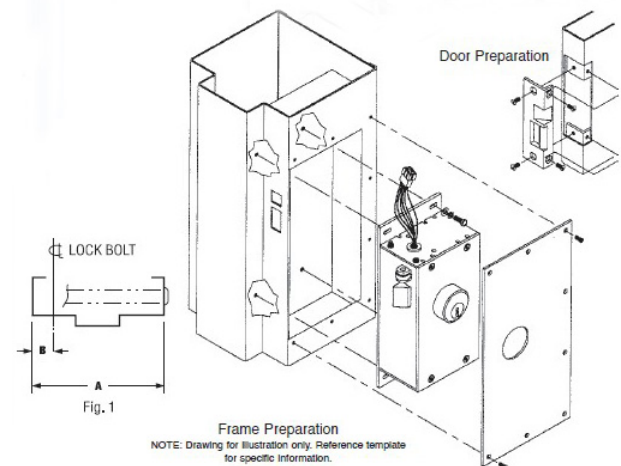

Swing Chart: Specify circled swing number when ordering.

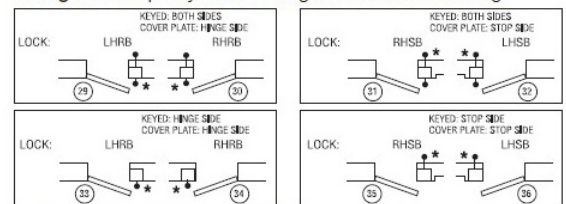

\* Indicates both mounting/access plate side.

UL Listed For Use On Three hour Fire Doors. • UL Listed As Burglary Resistant.  
Astm F 1577 Certified Impact Test-Grade1

For More information please call 210-123-4567

