



## 10120AM Motor Operated Electro-Mechanical Deadlatch



# Electric Locks



For More information please call 210-123-4567

# Electric Locks

## 10120AM Motor Operated Electro-Mechanical Deadlatch



### STANDARD FEATURES

- Deadlock indication switch
- Mechanical latchback
- Strike with security fasteners
- Mogul cylinder (US26D Finish)
- Plug connector
- High torque motor
- Fail secure
- Mounting fasteners

**10120AM-1: KEYED ONE SIDE**  
**10120AM-2: KEYED BOTH SIDES**

### APPLICATION

Medium and maximum security swinging doors that are to be unlocked from a remote location. Jamb mounted. Door position indicator switch, door closer and heavy duty door pull are recommended.

### FUNCTION

**ELECTRIC** - Remote switch activates a motor which retracts the latchbolt. Latchbolt remains retracted until door is opened approximately 2", then it releases, automatically latches and deadlocks when the door is closed.

**MECHANICAL** - Latchbolt is retracted with a mogul key at the door, and remains retracted until door is opened approximately 2", then it releases and automatically latches and deadlocks when the door is closed.

### OPTIONAL FEATURES

**HALF CYCLE HOLDBACK** - Remote two-position maintained contact switch is required for this function. Latchbolt is retracted electrically when switch is in open position. When remote switch is returned to locked position, latchbolt will extend when door is opened approximately 2". UL Listing for fire door not available with this function. Specify "D."

**NO LATCHBACK** - Allows latchbolt to extend without opening door. Normally used with "D" function. Specify "NL."

**KNOB FUNCTION** - Bolt retracted by knob on opposite side of mogul cylinder only. Specify "K."

**MECHANICAL KEY HOLDBACK** - Bolt retracted by key, remains retracted until manually projected with key. UL Listing for fire door not available with this function. Specify "MKH."



# Electric Locks

## 10120AM Motor Operated Electro-Mechanical Deadlatch

### OPTIONAL FEATURES CNT.


**LOCAL ELECTRIC KEYSWITCH** - Day key provides local electric operation and may be disabled from remote control point. Master key provides both electric and mechanical operation. Specify "LEK."

**NOTE:** Master keying available.


**KEY CYLINDER EXTENDER** - An option in place of providing a recess in the frame when keying on the stop side is required. Available in 3" or 5". 3" extender can be used on openings up to 6" jamb. 5" extender can be used on openings up to 8" jamb. Specify "KCE," then extender size. Other lengths available upon request.

**PROVIDE:**(See Fig.1)

1. Dimension "A" (overall frame width)
  2. Dimension "B" (edge of frame to center line of lockbolt)
- 24 VDC MOTOR** - Specify "24 VDC."

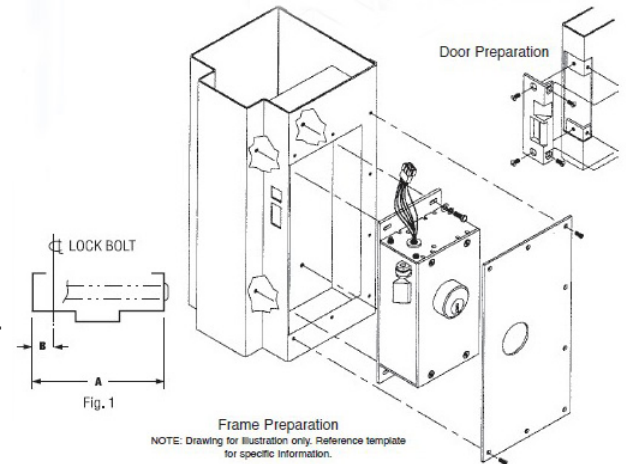

**Swing Chart:** Specify circled swing number when ordering.

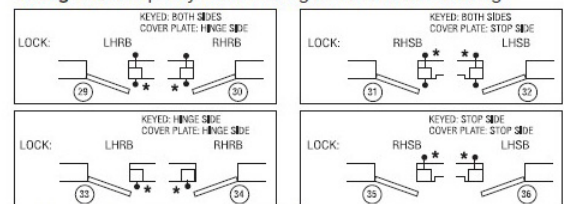

\* Indicates both mounting/access plate side.

### TECHNICAL DATA

Standard Finish	Galvanized
Cover	10 Gauge Steel Plate
Case	10 Gauge Steel Plate
Strike	Stainless Steel
Latchbolt	2" x 3/4" Stainless steel
Deadlock Actuator	Stainless steel
Mogul Cylinder	Us26d
Mogul Keys	Nickel Silver
Lock Size	17-13/16" H x 6-11/16" W x 3-1/2" D
Lock Weight	19 lbs.
Latchbolt Throw	1"
Electrical	115 VAC, 1 phase, 60 Hz., 10 Amp Inrush, 0.6 Amp Seated
Pin Tumblers	Six tumblers per lock

UI Listed For Use On Three hour Fire Doors. • UI Listed As Burglary Resistant.  
Astm F 1577 Certified Impact Test-Grade1



For More information please call 210-123-4567