



1030A Deadlock



Mechanical Locks



For More information please call 210-123-4567

Mechanical Locks

1030A Deadlock



STANDARD FEATURES

- Automatic deadlock
- Six heavy-duty tumblers
- Mounting fasteners

APPLICATION

High security sliding doors at holding cells, medium-to-low traffic corridors and cutoff doors. Sliding door normally requires a Model 1300 Track Set.

FUNCTION

Key activated unlocking. Hook bolt snaplocks upon closing. Final 3/8" of door travel pushes plunger pin against door jamb and deadlocks bolt.

OPTIONAL FEATURES

KNOB FUNCTION - Knob will retract hook bolt. Knob on one side only. No key required. Specify "1030AK." Knob finish US26D.

HOLLOW METAL MOUNTING - Used for hollow metal door application. Specify "HM."

GRATING DOOR MOUNTING - Used for grating door application. Specify "G."


1030A-1: KEYED ONE SIDE
1030A-2: KEYED BOTH SIDES

For More information please call 210-123-4567





Mechanical Locks

1030A Deadlock

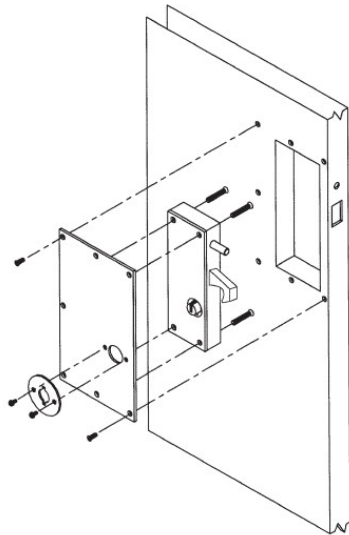

HM Mounting Shown

Swing Chart: Specify circled swing number when ordering.



* Indicates lock mounting/access plate side.

TECHNICAL DATA

Standard Finish	Galvanized
Cover	Cold-rolled Steel
Case	Ductile iron
Hookbolt	Cold-rolled, case-hardened steel
Paracentric Cylinder	Silicon bronze/ copper alloy
Tumblers	6 tumblers per lock
Lock Size	4.4" L x 3.15" H x 1.35" TK
Lock Weight	3 lbs
Lockbolt Size	1-1/2" H x 3/4" TK
Latchbolt	5/8" extended 1/2" travel



For More information please call 210-123-4567