



## 1051E Solenoid Operated Electro-Mechanical Deadlatch



# Electric Locks



For More information please call 210-123-4567

# Electric Locks

## 1051E Solenoid Operated Electro-Mechanical Deadlatch



### APPLICATION

Medium and maximum security swinging doors that are to be unlocked from a remote location. Jamb mounted. Door position indicator switch, door closer and heavy duty door pull are recommended.

### FUNCTION

**ELECTRIC** - Remote switch activates a solenoid which retracts the latchbolt. Latchbolt remains retracted until door is opened approximately 2", then it releases, automatically latches and deadlocks when the door is closed.

**MECHANICAL** - Latchbolt is retracted by a paracentric key at the door and remains retracted until door is opened approximately 2", then it releases, automatically latches and deadlocks when the door is closed.

Automatic deadlatch feature is suspended when paracentric key is rotated to mechanical key hold-back position. Normal function is resumed when key is returned to deadlocked position.

### STANDARD FEATURES

- Deadlock indication switch
- Mechanical latchback
- Six-tumbler lock
- Plug connector
- Continuous duty solenoid
- Fail secure
- Mounting fasteners
- Mechanical key holdback
- Adjustable deadlock actuator

### OPTIONAL FEATURES

**NO LATCHBACK** - Latchbolt remains retracted as long as control switch is activated. Latchbolt extends when power is removed. Specify "NL."

**EMERGENCY EXIT DOOR HOLDBACK** - Dead bolt retracted by solenoid or by key, extended by key only (no snap latch feature). When dead bolt is extended, lock is deadlocked. UL Listing for fire door not available with this function. Specify "EED."


**1051E-1: KEYED ONE SIDE**  
**1051E-2: KEYED BOTH SIDES**

For More information please call 210-123-4567




# Electric Locks

## 1051E Solenoid Operated Electro-Mechanical Deadlatch

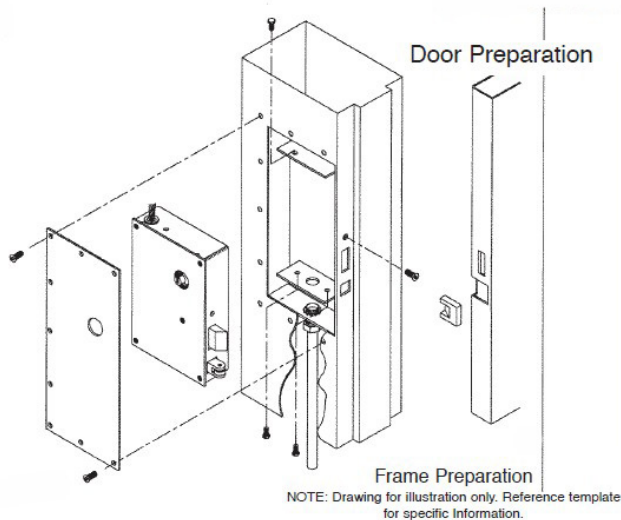

**Swing Chart: Specify circled swing number when ordering.**

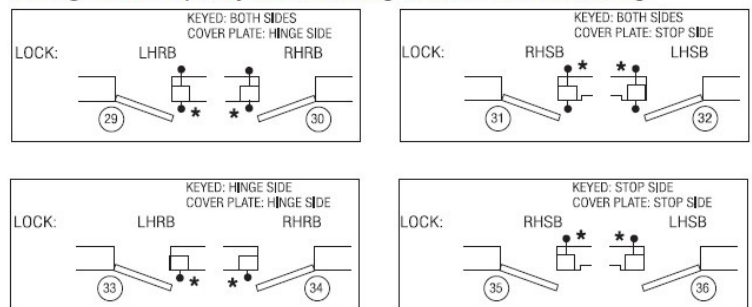

\* Indicates lock mounting/access plate side.

## TECHNICAL DATA

Standard Finish	Galvanized
Cover	3/16" steel plate
Case	3/16" steel plate
Locking	Cold-rolled, steel
Latchbolt	2" x 3/4" Stainless steel
Paracentric Cylinder	Silicon bronze/copper alloy
Tumblers	Six tumblers per lock.
Lock Size	13-3/8"H x 9"W x 3-1/8" D
Lock Weight	50 lbs.
Latchbolt Throw	1"
Electrical	115 VAC, 1 phase, 60 Hz., 12 amp inrush current, 0.6 amp seated current

UL Listed for use on three-hour fire doors. • UL Listed as burglary resistant.  
ASTM F 1577 Certified Impact Test-Grade 1.



For More information please call 210-123-4567