


60/60K Latch and Key Deadlocks

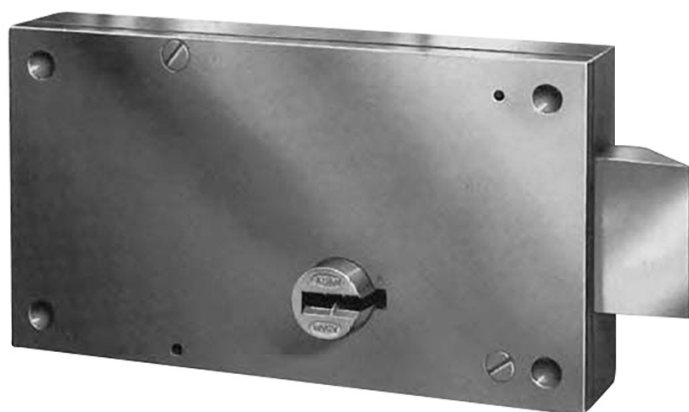

Folger Adam

Mechanical Locks

60/60K Latch and Key Operated Deadlocks



Optional Features

- Mounting – Hollow metal, grille or plate.
- Single knob (60K Series)
- Safety knob set (60K Series) – Specify “SK” for safety knob one side. “Double SK” for safety knob on both sides. (must be specified separately)
- 60-4B – Mortise strike and mounting screws.
- 60-4BL – Mortise strike with switch and mounting screws.
- 60-4DB – Mortise strike with dust box and mounting screws.
- 80-4F – Surface-mounted keeper and mounting screws.

62 Keyed cover side
66 Keyed both sides
62K Knob model keyed cover side
66K Knob model keyed both sides

Applications

Series 60 Locks are ideal for use on corridor, cell, dining room or recreational area doors. Series 60K Locks with knobs are suited for administrative or infirmary areas where staff personnel require the convenience of knob operation combined with slamlocking and the security of a deadlock. Specify handing.

Standard Features

- Knob operation (Series 60K) – Knob will operate latchbolt unless deadlocked.
- Mechanical operation – Locks and unlocks by key. A half-turn of the key unlocks, and a full turn of the key, in the opposite direction, deadlocks the latchbolt. Key is removable in the deadlocked and latched position.
- Automatic snap-locking – Automatically when door is closed.
- Durable case – Ductile iron case with 3/8” thick steel cover.
- Corrosion-resistance – Working parts are corrosion-resistant.
- Heavy-duty lever tumblers – 5 spring-temper brass tumblers, activated by heavy phosphor-bronze springs. Precision fit to locking fence.
- Large solid latchbolt – Zinc plated steel, 2” x 3/4” with two hardened steel roller pins to resist sawing. Bolt projects 1/2” when retracted.
- Bolt throw – 3/4”
- Bolt projection – 1/2” or 1-1/4” are standard. Use 1-1/4” projection for stop side mounting.
- Investment-cast key cylinder – One-piece bronze alloy with paracentric keyway.
- Knobs and roses (Series 60K) – US26D finish attached to a 3/8” square spindle by exposed set screws on one side, and a concealed crosspin on the other. Knobs are provided for both sides unless specified otherwise.
- Finish (Series 60K) – Trim satin chrome US26D,





For More information please call 210-533-1231

Mechanical Locks

60/60K Latch and Key Operated Deadlocks

Note: Dimensions are for information and planning purposes only, and should not be used as templates.

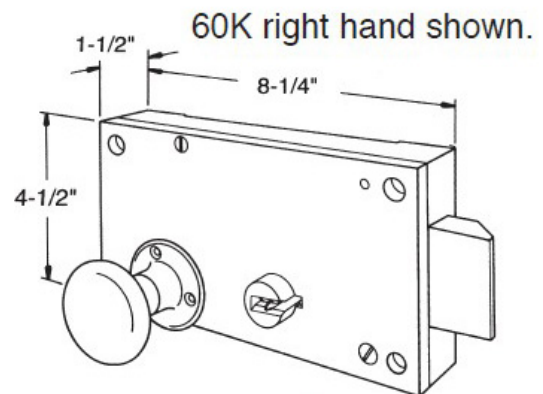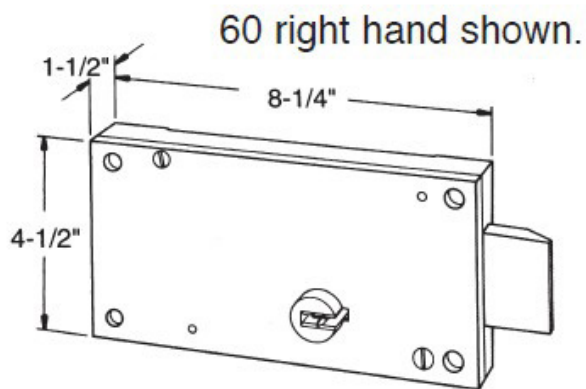


Specify circled swing number when ordering.

MOUNTING PLATE HINGE SIDE		
KEYED BOTH SIDES	13 RHSB	LHSB 14
KEYED HINGE SIDE	17 RHSB	LHSB 18
KEYED STOP SIDE	21 LHRB	RHRB 22

MOUNTING PLATE STOP SIDE		
KEYED BOTH SIDES	15 LHRB	RHRB 16
KEYED STOP SIDE	19 LHRB	RHRB 20
KEYED HINGE SIDE	23 RHSB	LHSB 24

LEGEND

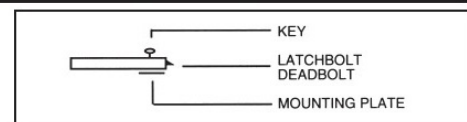

For More information please call 210-533-1231

