



## 7060 & 7060M Deadbolt Lock



# RR Brink



For More information please call 210-123-4567

# Mechanical Locks

## 7060 & 7060M Deadlatch



### APPLICATION

The 7060 is a lever-tumbler latch appropriate for jail and prison holding cells, storage rooms, and passage doors where the convenience of slam locking makes it preferable to the RRBLS 7080 deadbolt. Unlocking and locking of the beveled bolt is by an RRBLS paracentric key. When a door is closed, deadlocking of the 7060 requires two revolutions of the key. It is important that correctional officers observe this requirement to avoid a security breach by clandestine latch retraction with end force (e.g. "carding").

As an option, the 7060 is available with latch retraction by knob or "Lever Eskort" (see inset above) sets. These models are designated 7060K and 7060L, respectively. When the latch is deadlocked by two turns of the key, the knobs or levers are rendered inactive, i.e. rigid.

### STANDARD FEATURES

- Industry standard template
- Malleable iron lock case, zinc plated
- 7060 – Integral, bronze alloy investment cast, one piece paracentric key cylinder. 7060M – fitted for a 2" diameter cylinder - priced separately – see "Key Cylinder" catalog sheet.
- Zinc plated steel deadlatch with two hardened steel inserts
- 7060 – Six hard brass lever tumblers Heavy bronze tumbler spring, random-depth key cuts impede "picking", lever tumblers are provided with "anti-pick" notches for both locked and unlocked condition
- Latch throw: 3/4"
- Latch retracted projections: 1/2" (with hinge side mounting); 1-1/4" (with stop side mounting).
- Latch size: 2" x 3/4".
- Four mounting screws included

#### **Accessories** (must be ordered separately)

- Prison mogul and paracentric key – Investment cast bronze alloy – specify number of keys required
- Bolt keepers

**K** standard mortise

**KD** mortise with dust box

**KS** mortise with indication switch

**KSA** surface applied

For More information please call 210-123-4567



# Mechanical Locks

## 7060 & 7060M Deadlatch


### STANDARD FEATURES CNT.

- **Escutcheon** - Satin Stainless Steel – (ANSI 630, US32D)
- **Cylinder shield** – A surface applied flap which closes off the keyway to outside debris at exterior locations – ANSI 630, US32D finish only.

#### Lock Mountings (must be ordered separately)

The 7060 lock should be encased and protected on the door with an appropriate steel mounting. Mountings are constructed of 7-gauge steel with an electroplated finish for corrosion resistance. Mountings are removable for cleaning and repair of lock. Escutcheons must be purchased separately. All mounting screws are included. Consult factory directly for template of lock mountings.

- **Hollow Metal Mounting** (specify HM Mounting) – for use on hollow metal doors.
- **Plate Mounting** (specify P Mounting) – for use on steel plate doors. Allows lock to be rim-mounted.
- **Grille Mounting** (specify G Mounting) – for use on grille (steel bar) type doors. Designed for welding to grille.

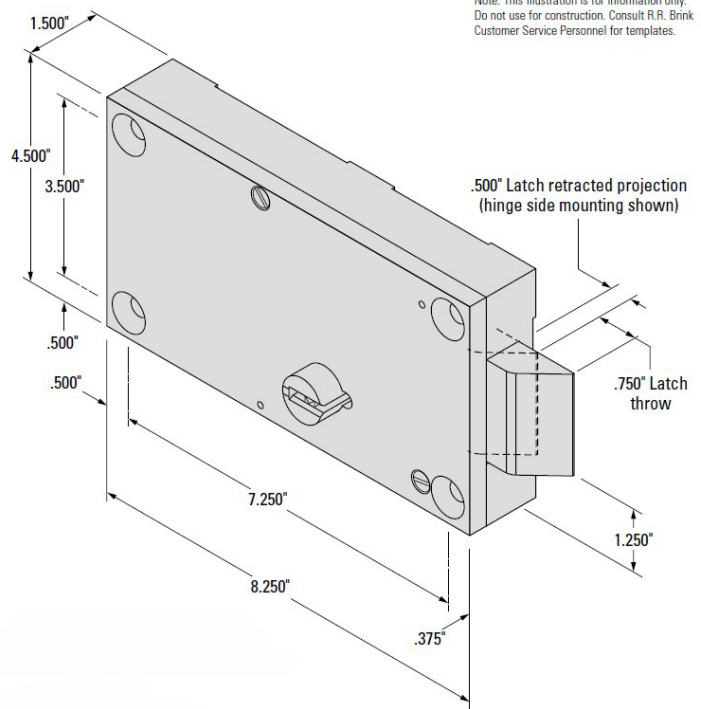

### ORDERING INFORMATION

| Model | Description     | Keyed two sides |
|-------|-----------------|-----------------|
| 7062  | Keyed one side  | Paracentric key |
| 7066  | Keyed two sides | Paracentric key |
| 7062K | Keyed one side  | Knob            |
| 7066K | Keyed two sides | Knob            |
| 7062L | Keyed one side  | Lever Eskort    |
| 7066L | Keyed two sides | Lever Eskort    |



For More information please call 210-123-4567