

FGM-80 Fence Gate Lock



Folger Adam



For More information please call 210-533-1231

Mechanical Locks

FGM-80 Fence Gate Lock/Mounting



Accessories

(must be specified separately)

- 80-4H – Fence gate lock keeper, zinc plated finish.
- Pull(s) – #2 Pulls may be added to one or both sides of the mounting.

Applications

FGM-80 Deadlocks are designed for use in outdoor applications to secure swinging fence gates. Specify handing when ordering.

Standard Features

- Mechanical operation – Locks and unlocks by key. For key removal in locked position only, specify single wing escutcheon.
- Durable construction – Ductile iron case, 3/8" thick steel cover.
- Tamper resistant mounting – Formed from 7 gauge steel with break-off-head security screws.
- Corrosion resistance – Working parts are corrosion resistant.
- Heavy duty lever tumblers – Springtemper brass, activated by heavy phosphor bronze springs. Precision fit to the locking fence.
- Large, solid deadbolt – Zinc plated steel, 2" x 3/4" with three hardened steel roller pins to resist sawing. Bolt is flush with mounting when retracted.
- Bolt throw – 3/4"
- Investment-cast key cylinder – One-piece, bronze alloy with paracentric keyway.
- Finish – All exposed lock components and mounting hardware zinc plated for exterior application.
- Supplied – With front bar and cylinder shield one or both sides, and zinc plating.

FGM-82 Five tumbler model keyed cover side
FGM-82-6 Six tumbler model, keyed cover side
FGM-86 Five tumbler model, keyed both sides
FGM-86-6 Six tumbler model, keyed both sides


For More information please call 210-533-1231







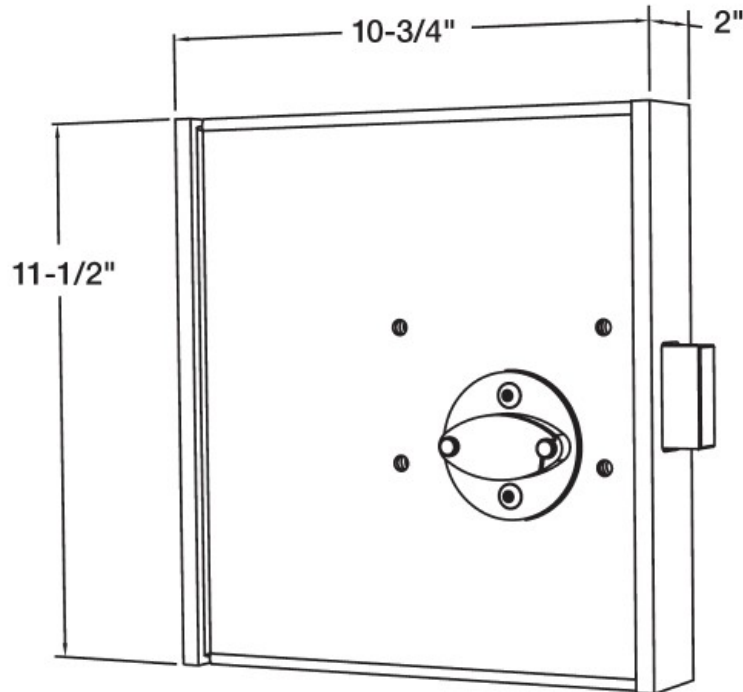

Mechanical Locks

FGM-80 Fence Gate Lock/Mounting

Note: Dimensions are for information and planning purposes only, and should not be used as templates.




Specify circled swing number when ordering.

MOUNTING PLATE HINGE SIDE		MOUNTING PLATE STOP SIDE	
KEYED BOTH SIDES	<div><div>1</div><div>RH</div><div></div><div>LH</div><div>2</div></div>	<div><div>3</div><div>LH</div><div></div><div>RH</div><div>4</div></div>	
KEYED HINGE SIDE	<div><div>5</div><div>RH</div><div></div><div>LH</div><div>6</div></div>	<div><div>7</div><div>LH</div><div></div><div>RH</div><div>8</div></div>	
KEYED STOP SIDE	<div><div>9</div><div>LH</div><div></div><div>RH</div><div>10</div></div>	<div><div>11</div><div>RH</div><div></div><div>LH</div><div>12</div></div>	

1-1/4" projection required with stop-side mounting.

LEGEND

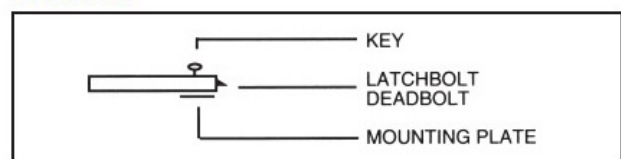

For More information please call 210-533-1231