

30/30D Locks



Folger Adam





Mechanical Locks 30/30D Locks



Optional Features

 Mounting – Hollow metal, grille or plate door mounting.

Accessories

(must be specified separately)

- 30-4B Mortise keeper with mounting screws.
- 30-4BL Mortise keeper with switch
- and mounting screws. 30-4DB Mortise keeper with dustbox and mounting screws.
- 30-4F Surface mounted keeper andmounting screws.

Applications

Series 30 Deadlatches are recommended for sliding doors requiring slam-locking, such as corridor or entrance doors. Doors should never be left unattended in open position. Not for use on cells. Specify handing.

Series 30D Deadlocks are recommended for use on sliding cell, corridor or entrance doors. Ideal for doors left open or unattended at times.

Standard Features

- Automatic deadlocking (Series 30) Deadlocks on door closure, unlocks by key. Key is removable in the latch position only.
- Mechanical operation (Series 30D) Deadlocks and unlocks by key. Key is removable in both locked and unlocked condition.
- Durable case Ductile iron case with 3/16" thick steel cover.
- Corrosion resistance Working parts are corrosion resistant.
- Heavy-duty lever tumblers 5 spring-temper brass tumblers, activated by heavy phosphor-bronze springs. Precision fit to locking fence.
- Large, solid hookbolt Zinc plated, hardened steel, 1/2" thick.
- Bolt movement 5/8" lift.
- Investment-cast key cylinder One-piece bronze alloy with paracentric keyway.
- Finish Zinc plated.


32 Keyed cover side 36 Keyed both sides 32D Keyed cover side 36D Keyed both sides





Mechanical Locks 30/30D Locks

Note: Dimensions are for information and planning purposes only, and should not be used as templates.

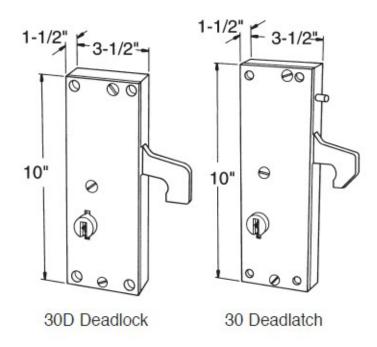

Specify circled swing number when ordering.

LOCK MOUNTING TRACK SIDE

