

70 Deadlatch



Folger Adam



For More information please call 210-533-1231

Mechanical Locks

70 Deadlatch



Optional Features

- Mounting – Hollow metal, grille or plate.

Accessories

(must be specified separately)

- 70-4B – Mortise strike with mounting screws.
- 70-4BL – Mortise strike with switch/ mounting screws.
- 70-4DB – Mortise strike with dust box and mounting screws.
- 70-4F – Surface-mounted keeper and mounting screws.
- Automatic deadlocking – Locks when door is closed; unlocks by key.
- Deadlock actuator – 3/4" x 3/4" cold drawn steel with zinc plated finish.
- Durable case – Ductile iron case with 3/8" steel cover.
- Corrosion-resistance – Working parts are corrosion-resistant.
- Heavy duty lever tumblers – 5 spring-temper brass tumblers, activated by heavy phosphor-bronze springs. Precision fit to locking fence.
- Large, solid latchbolt – Zinc plated steel, 2" x 3/4" with two hardened steel roller pins to resist sawing. Bolt projects 1/2" when retracted.
- Bolt throw – 3/4"
- Bolt projection – 1/2" and 1-1/4" are standard. Specify one.
- Investment-cast key cylinder – One-piece bronze alloy with paracentric keyway.
- Finish – Zinc plated.

Applications

Series 70 Deadlatches are recommended for heavily used doors such as those in dayrooms, recreation areas or dining rooms. Convenient slam-locking. Specify handing.

Standard Features

72 Keyed cover side
76 Keyed both sides


For More information please call 210-533-1231



Mechanical Locks

70 Deadlatch

Note: Dimensions are for information and planning purposes only, and should not be used as templates.

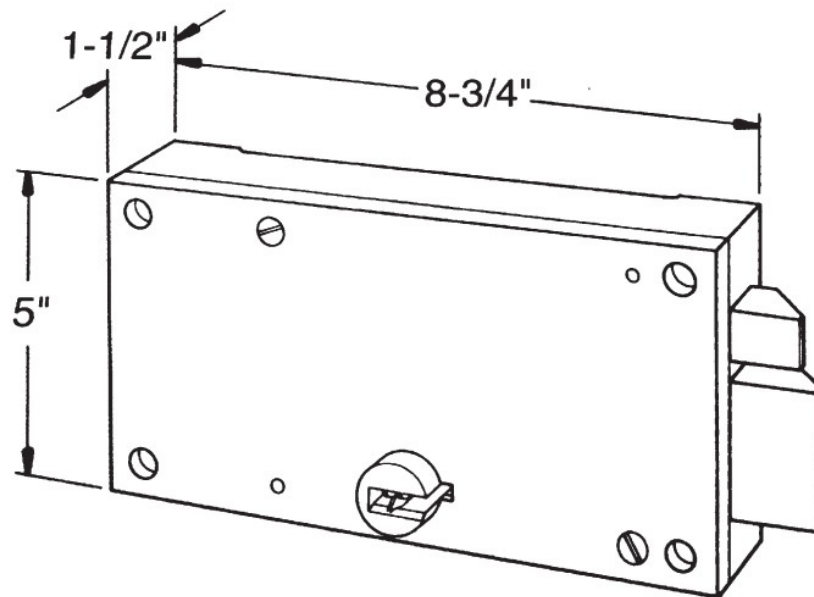


KEYED BOTH SIDES	13 RHSB	LHSB 14
KEYED HINGE SIDE	17 RHSB	LHSB 18
KEYED STOP SIDE	21 LHRB	RHRB 22

KEYED BOTH SIDES	15 LHRB	RHRB 16
KEYED STOP SIDE	19 LHRB	RHRB 20
KEYED HINGE SIDE	23 RHSB	LHSB 24

1-1/4" projection required with stop-side mounting.

LEGEND

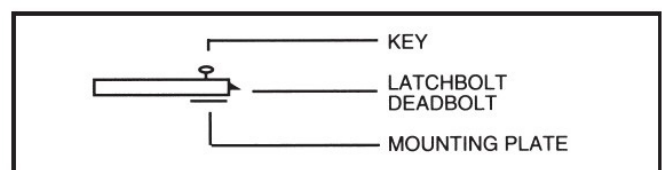

For More information please call 210-533-1231