

80 Deadlock



Folger Adam

Mechanical Locks

80 Deadlock



Accessories

(must be specified separately)

- 80-4B – Mortise keeper and mounting screws.
- 80-4BL – Mortise keeper with switch and mounting screws.
- 80-4DB – Mortise keeper with dustbox and mounting screws.
- 80-4F – Surface mounted keeper and mounting screws.

Applications

Series 80 Deadlocks are designed for use on cell doors, corridor doors, dormitory doors and dayrooms. They are also suited for storage rooms or large control cabinets. Specify handing when ordering.

Standard Features

- Mechanical operation – Locks and unlocks by key. For key removal in locked position only, specify a single wing escutcheon on lock mounting or access door.
- Durable case – Ductile iron case, 3/8" thick steel cover.
- Corrosion resistance – Working parts are corrosion resistant.
- Heavy-duty lever tumblers – Spring temper brass activated by heavy phosphor bronze springs. Precision fit to locking fence.
- Large, solid deadbolt – Zinc plated steel with three hardened steel roller pins to resist sawing, 2" x 3/4". Projects 1/2" when retracted.
- Bolt throw – 3/4"
- Bolt projection – 1/2" or 1-1/4" standard.
- Investment-cast key cylinder – One-piece, bronze alloy with paracentric keyway.
- Finish – Zinc plated for corrosion resistance.

Optional Features

- High security – Six-tumbler model offers greater pick resistance.
- Mounting – Hollow metal, plate or grille mounting.

82 Five tumbler model, keyed cover side
82-6 Six tumbler model, keyed cover side
86 Five tumbler model, keyed both sides
86-6 Six tumbler model, keyed both sides




For More information please call 210-533-1231







Mechanical Locks

80 Deadlock

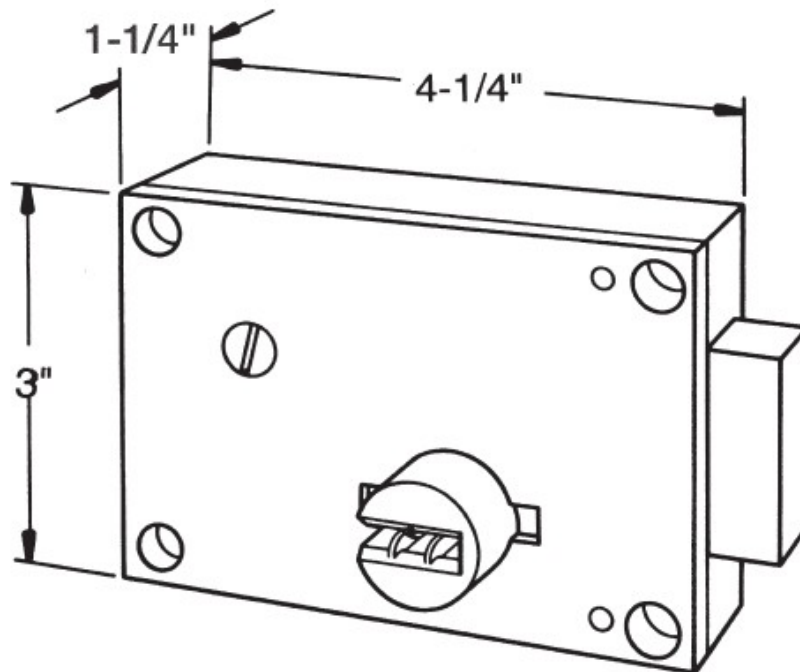Note: Dimensions are for information and planning purposes only, and should not be used as templates.




Specify circled swing number when ordering.

MOUNTING PLATE HINGE SIDE		MOUNTING PLATE STOP SIDE	
KEYED BOTH SIDES	<div>1 RH</div>  <div>LH 2</div>	<div>3 LH</div>  <div>RH 4</div>	
KEYED HINGE SIDE	<div>5 RH</div>  <div>LH 6</div>	<div>7 LH</div>  <div>RH 8</div>	
KEYED STOP SIDE	<div>9 LH</div>  <div>RH 10</div>	<div>11 RH</div>  <div>LH 12</div>	

1-1/4" projection required with stop-side mounting.

LEGEND

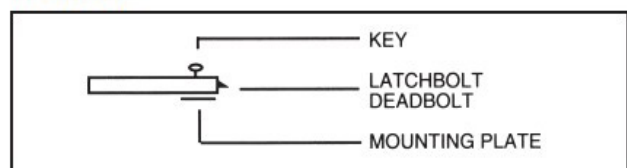

For More information please call 210-533-1231

